

Victor Products Ltd
Unit 3A, Tyne Dock East Side
Port of Tyne,
South Shields,
Tyne and Wear
NE33 5SQ
United Kingdom
Tel : +44(0)191 2808000
Fax : +44(0)191 2808080



CE 2813
UK
CA 0518

Making Hazardous Environments Work

TYPE ML102 LED FACE LIGHT

EXPLOSION PROOF LUMINAIRE WITH FLAMEPROOF PROTECTION (TYPE d)


Certification number SIRA 09 ATEX 1328 I M2 Ex db I Mb IP65

Certification number IECEx SIR 09.0134 Ex db I Mb IP65

Certification number CSAE 21UKEX1316 I M2 Ex db I Mb IP65

The certificate carries the group and category marking: - I M2

Where: I signifies suitability for use in mining and M2 signifies suitability for use in mines where it must be de-energised in the presence of an explosive atmosphere.

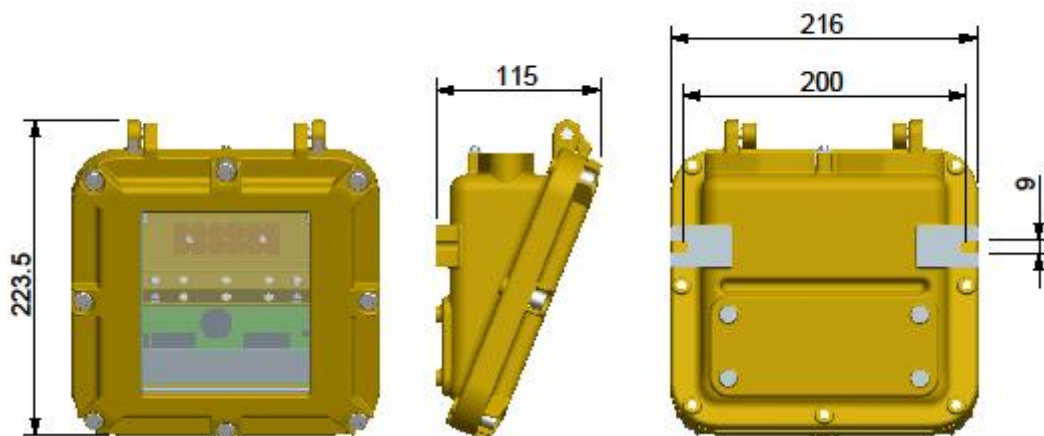

IMPORTANT

1. Read this leaflet carefully before commencing to install the luminaire and retain it for future reference.
2. Check the rating label to ensure that the luminaire is suitable for the supply provided.
3. The operating temperature range is -15°C to $+45^{\circ}\text{C}$.
4. The luminaire **MUST** be earthed.
5. Under **NO** circumstances should a luminaire be opened, even when isolated, when an explosive gas or dust environment is present.
6. If using non-threaded glands, the 2 off screws per gland must be M6 socket head cap screws, steel or stainless steel, grade 8.8min to ISO 898-1, and must have a thread engagement between 6mm and 10mm into the gland fixing holes.
7. **DO NOT LOOK DIRECTLY INTO LUMINAIRE.**

Item number 193102
January 2024


INSTALLATION

a) Mounting



The luminaire has mounting brackets as shown on the diagram above. The luminaire must be securely fastened in place. It can be mounted in any attitude. If magnets are to be used for mounting, they can be supplied by Victor Products Limited.

b) Cable entries


Up to two cable entry holes for the accommodation of a suitable certified flameproof cable entry device/blanking plug (with or without the interposition of a suitable flameproof adaptor). The flameproof cable entry device/blanking plug/adaptor must be certified Group I under an EC-type certificate to directive 2014/34/EU, or Group I certified under the IECEx scheme, or Group I UKEX certified as appropriate to the installation. The cable entry devices and cabling methods used in service must be suitable for their intended duty and the special types of cable used in mining.

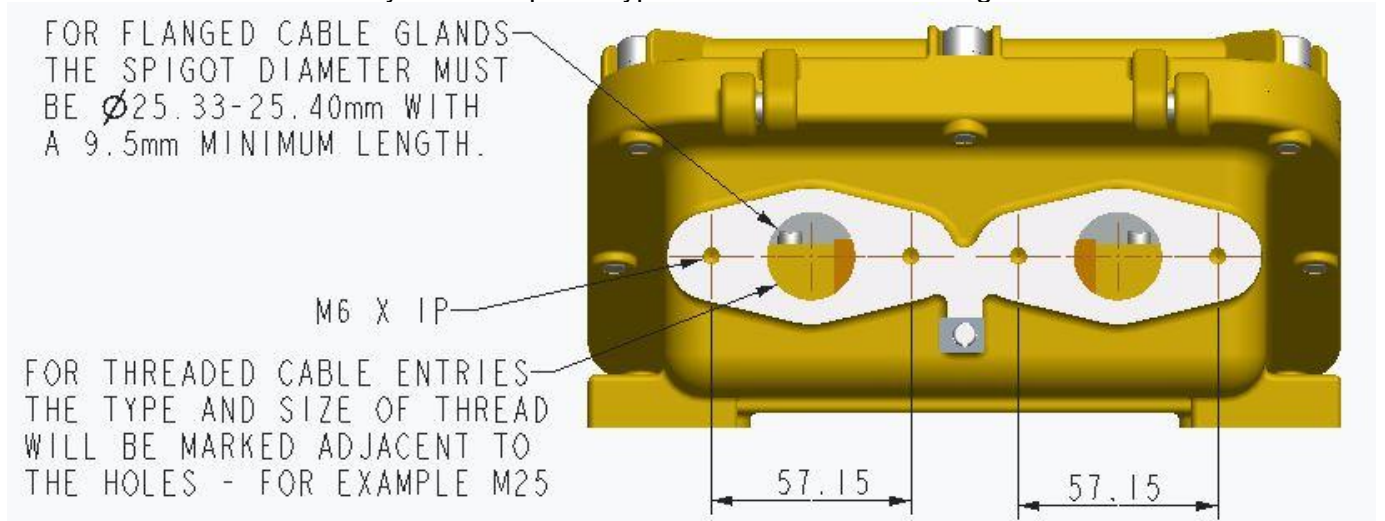

Access to the terminal block is made by removing all eight socket head cap screws on the front of the unit. The hinged lampglass assembly can then be opened. The terminal block is suitable for 6mm² cable. All terminal screws, used and unused should be fully tightened down.

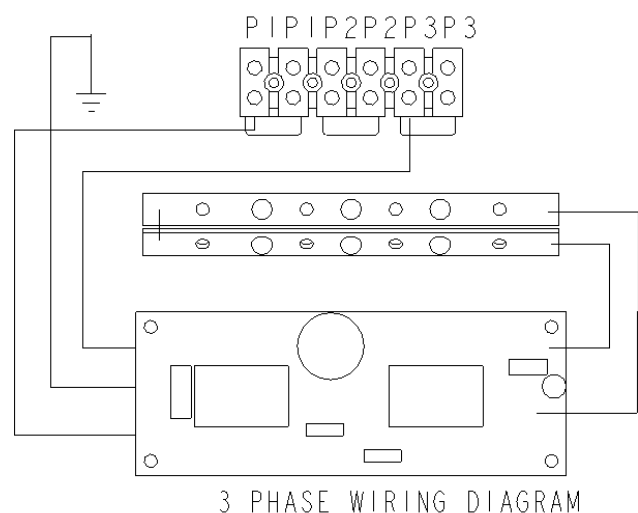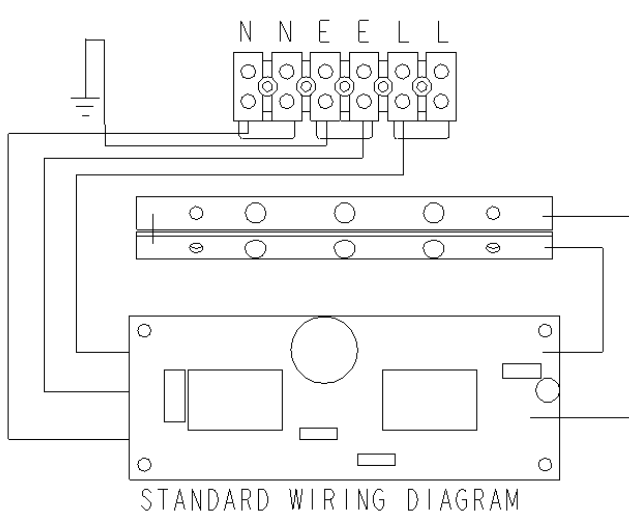

FITTING OR REPLACING LED STRIPS OR DAMAGED LAMPLGLASS ASSEMBLIES

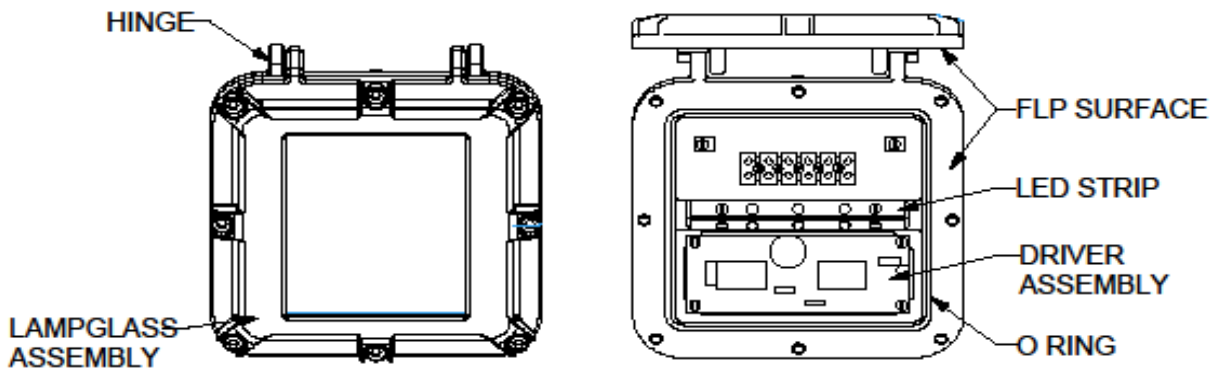

1. Remove all eight socket head cap screws from the front of the unit. The hinged lampglass assembly can then be opened.
2. The LED strips and/or driver assembly can be removed by disconnecting the cables from terminal block and from the push on terminals on the driver assembly. Remove the retaining screws.
3. Replace the LED strips and/or driver assembly. Fasten in place with the retaining screws and washers. Connect the cables to the terminal block ensuring all terminal screws are fully tightened down. Connect the cables from the LED strips to the push on terminals on the driver assembly ensuring correct polarity.
4. If the lampglass assembly is to be replaced, remove the hinge screws. Replacement is the reversal of this procedure.
5. Ensure O ring is fitted in place and apply a thin coating of a non-setting grease (silicone) to the FLP surfaces before closing the lampglass assembly.
6. Re-fit all eight socket head cap screws and washers. Fully tighten down all screws.

MAINTENANCE AND INSPECTION.

Frequency of inspection must be determined by the installer, but should be frequent enough to ensure that the luminaires continue to work in their designed manner. The more onerous the working conditions, the more frequent the inspection. The interval should never exceed two years.

The following list indicates some of the points that should be given particular attention. Suitable repairs should be carried out if required:-

- a) Clean all flameproof paths using a non-metallic or suitable non-corrosive cleaner and examine the flameproof paths for signs of damage. Replace damaged parts.
- b) Dirty lampglass should be cleaned.
- c) Replace cracked or damaged lampglass assemblies.
- d) Replace any missing fasteners with items of the correct type and quality.
- e) Fit new gaskets, lock-washers, etc as appropriate.
- f) Grease all flamepaths and screw threads with a non-setting grease (e.g. silicone)
- g) Ensure that blind tapped holes are clear of dirt, etc that could prevent correct closure of joints.
- h) Do not over-tighten fasteners on re-assembly.
- i) Ensure all mountings are secure and not corroded.
- j) Check cable glands for tightness and check the luminaire is efficiently earthed.
- k) Check resined joints for deterioration. If damaged then the assembly must be replaced in its entirety.
Resined components cannot be repaired except by the manufacturer.
- l) Any mechanically damaged parts must be replaced.
- m) A list of spares can be obtained from the manufacturer.

GENERAL

All components that are replaced should be in accordance with the manufacturer's specification. Failure to use approved parts invalidates the certification and approval of the luminaire and may make it dangerous.

NO modifications should be made to the luminaire without the knowledge and approval of the manufacturer.


HEALTH AND SAFETY AT WORK etc. ACT 1974

In the United Kingdom all equipment must be installed, operated and disposed of (as required) within the legislative requirements of the Health and Safety at Work etc. Act 1974. Leaflet No. HSS L1 refers to the Company's obligation and is available on request.

It is the responsibility of the user to select, install, operate and maintain the equipment in accordance with the relevant legislation and appropriate code of practice.



EU Only

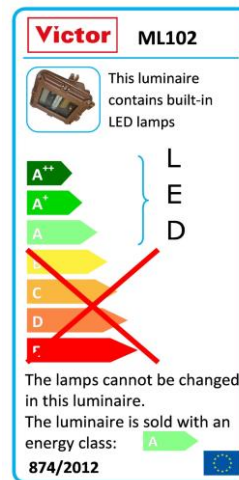

WEE Producers Identification No. WEE/EA 0073UQ

Prices and design are subject to alteration without notice. All products are sold subject to our conditions of sale, copies of which are available on request.

We reserve the right to change characteristics of our products. All data is for guidance only

BLANK

BLANK

UK Declaration of Conformity




Victor Products Ltd
Unit 3A, Tyne Dock East Side
Port of Tyne,
South Shields,
Tyne and Wear
NE33 5SQ
United Kingdom

TYPE ML102 LED FACE LIGHT Certification number CSAE 21UKEX1316

Victor Products Ltd

Hereby declare our sole responsibility that the product which is the subject of this declaration is in conformity with the following standards or normative documents.

| Number and date of standard | UK Legislation |
|---|---|
| BS EN IEC 60079-0:2018 BS EN 60079-1:2014 | Equipment and Protective Systems Intended for use in Potentially Explosive Atmospheres Regulations 2016 |
| EN 50082 (1992) EN 55015 (1993) EN 60555-2 (1987) | 2016 No 1091: Electromagnetic Compatibility |
| UK Approval Body: CSA Group Testing UK Ltd Deeside CH5 3US Notified Body No. 0518 |  P. Devlin Operations Manager January 2024 |

SERIAL NUMBER

Declaration of Conformity

Déclaration De Conformité
Konformitätserklärung



Victor Products Ltd
Unit 3A, Tyne Dock East Side
Port of Tyne,
South Shields,
Tyne and Wear
NE33 5SQ
United Kingdom

TYPE ML102 LED FACE LIGHT


Certification number SIRA 09 ATEX 1328
IECEX SIR 09.0134

Victor Products Ltd

Hereby declare our sole responsibility that the product which is the subject of this declaration is in conformity with the following standards or normative documents.

Erklären in alleiniger Verantwortung, daß das Product auf das sich diese Erklärung bezieht, mit der/den folgenden Norm(en) oder normativen Dokumenten Ubereinstimmt.

Déclarons de notre seule responsabilité, que le produit auquel cette déclaration se rapporte, est conforme aux norme(s) ou aux documents normatifs suivants.

| Number and date of standard Nr. Sowie Ausgabedatum der Norm No. Ainsi que date d'émission des normes. | Directive description Bestimmungen der Richtlinie Prescription de la directive |
|--|---|
| BS EN IEC 60079-0:2018 BS EN 60079-1:2014 | Equipment and protective systems intended for use in potentially explosive atmospheres. This Attestation is valid for directive 2014/34/EU. Geräte und Schutzsysteme zur bestimmungsgemäßen Verwendung in explosionsgefährdeten Bereichen. Diese Bescheinigung gilt für die Richtlinie 2014/34 /EU. Appareils et systèmes de protection destinés a être utilisés en atmosphères explosibles. Cette Attestation est valable pour la directive 2014/34 /UE. |
| EN 50082 (1992) EN 55015 (1993) EN 60555-2 (1987) | 2014/30/EU: Electromagnetic Compatability 2014/30/EU: Elektromagnetische Verträglichkeit 2014/30/EU: Compatabilité électromagnétique |
| Notified Body: CSA Group Netherlands B.V. Notified Body No. 2813 |  P. Devlin Operations Manager January 2024 |

SERIAL NUMBER