

Flameproof Luminaire for General and Roadway Lighting



SPECIFICATION

- ▼ Quick start control gear. Suitable for T12 and T8 lamps, two pin interface to spec. 691/1981.
- ▼ 65watt and 20 watt versions available.
- ▼ Approximate Weights.

65W	17Kg
20W	13Kg

Photometric data available on request.
Installation leaflet 148464
Installation Drawing LP91

STANDARDS/APPROVALS

Approved to BS 4683 Parts 2: 1971 (Group 1)
HSE(M) CERT. No. 83032 (Type No. 41L)
Acceptance No. 1628.
Maximum Surface Temp. 85°C (T6)
in accordance with B.S. 4683 Part 1.
Ambient Temperature 40°C (max)

FEATURES

- ▼ Easy installed using plugs to spec 691/1984.
- ▼ Quick relamp. Lampglass secured by single bolt and if necessary can be removed completely by withdrawing two split pins.
- ▼ Protected against dust and water ingress.
- ▼ Guard available as option.
- ▼ Castings made from zinc alloy which reduces weight and avoids rusting.
- ▼ Replaceable control gear.
- ▼ Two principle voltages available 240v and 120v. The 120 volt gear being suitable for the 110/130v range.
- ▼ Plugs for use with Type 41L.


Victor Type LP2 or for PWA cable,
LP4 for SWA Cable.

Victor

VICTOR PRODUCTS LIMITED

New York Way New York Industrial Park Newcastle upon Tyne NE27 0QF United Kingdom

Tel: 0191 280 8000 Fax: 0191 280 8080 e-mail: sales@victor.co.uk <http://www.victor.co.uk>

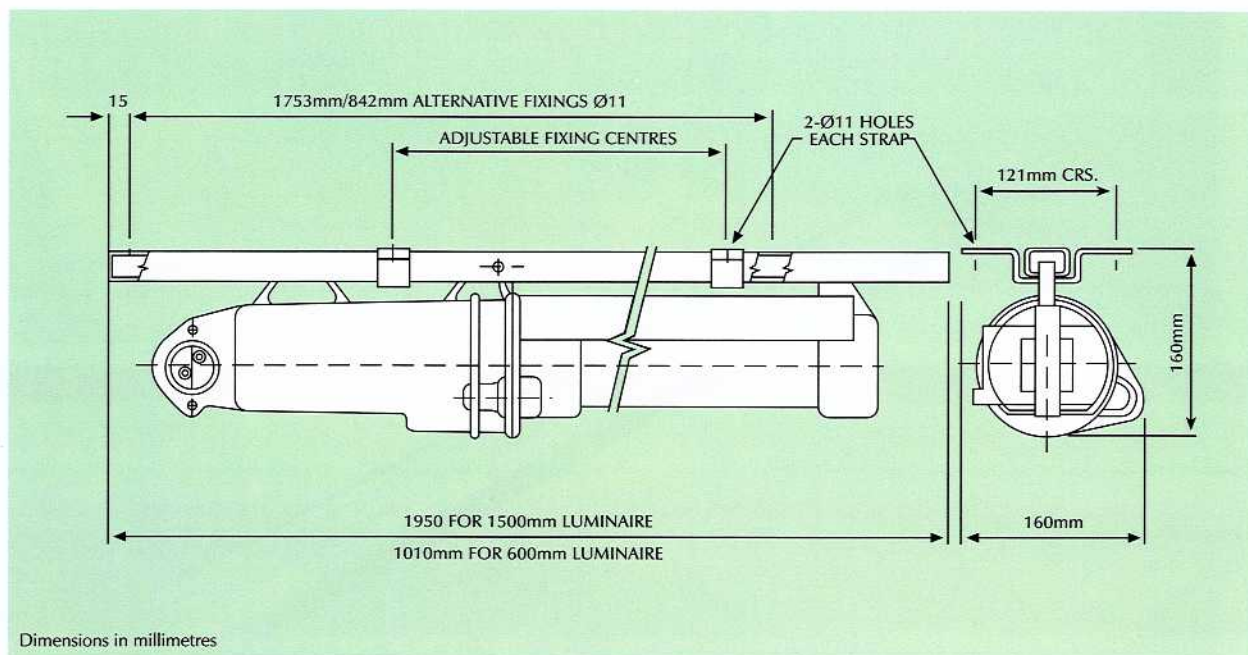

ORDERING REFERENCES

DESCRIPTION	REF. NO.	SPARES	REF. NO.
All luminaires for 50Hz supply.			
240V, 65W glass	ML042956	65W Overtube assy.	ML948130
240V, 20W glass	ML042958	20W Overtube assy.	ML948130B
120V, 65W glass	ML042956A	65W Proximity strip	ML991030
120V, 20W glass	ML042958A	20W Proximity assy.	ML99130B
120V/240V 20W glass	ML042956B	65W 240V 50Hz Control gear	ML148278T
120V/240V 20W glass	ML042958B	65W 120V 50Hz Control gear	ML143084T
Guard for 65W luminaire	ML041835	20W 240V 50Hz Control gear	ML143188T
Guard for 20W luminaire	ML041801	20W 120V 50Hz Control gear	ML143381B
Closer cap 2 pin interface	ML000440	65W Dual 50Hz Control gear	ML148011T
Plug LP4 for SWA cable	ML043363	20W Dual 50Hz Control gear	ML148010T
Plug LP2 for PWA cable	ML042731		
60Hz Supply			
110V 20W glass	ML043932		
110/120V 40W glass	ML043146		

For other auxiliaries see the spec. leaflet.

HEALTH AND SAFETY

In the United Kingdom all equipment must be installed, operated and disposed of (as required) within the legislative requirements of the Health & Safety at Work etc. Act 1974. Leaflet No. HSS 11 refers to the Company's obligations and is available on request. It is the responsibility of the user to select, install, operate and maintain the equipment in accordance with the relevant legislation and appropriate codes of practice.