



Type MA/B




Type MA/FT

SPECIFICATION

- ▼ Ex d for Group 1 Mining applications.
- ▼ CMP Type MA/FT, MA/B Cable gland accessories
- ▼ Designed to BS 6121: Part 1:1989, EN50262:1999

CERTIFICATION & APPROVAL

EN 60079-1:2007 and IEC 60079-0:2007.

ATEX Certified  I M2 Ex d I.

Component certificate No.

MA/FT : -

Sira09ATEX1034U & IECEx SIR 09.0024U.

MA/B : -

Sira09ATEX1035U & IECEx SIR 09.0025U.

Additional certification to GOST R and GOST K also available.

Ingress Protection
IP66

Contact sales for further information

FEATURES

- ▼ Spigot to thread adaptors providing conversion for all cable glands from spigot entry to threaded entry
- ▼ Conversion from one size to another is possible.
- ▼ Operating temperature range from – 60 °C to + 200 °C

OPTIONS

- ▼ Brass, Nickel Plated Brass & Stainless Steel options available



Victor

VICTOR PRODUCTS LIMITED


New York Way, New York Industrial Park, Newcastle upon Tyne, NE27 0QF United Kingdom
Tel: 0191 280 8000, Fax: 0191 280 8080 e-mail: sales@victor.co.uk www.victor.co.uk

A Federal  Signal Company

APPLICATION

The cable gland adaptor accessories can be used for a wide variety of LV applications.

DIMENSIONS

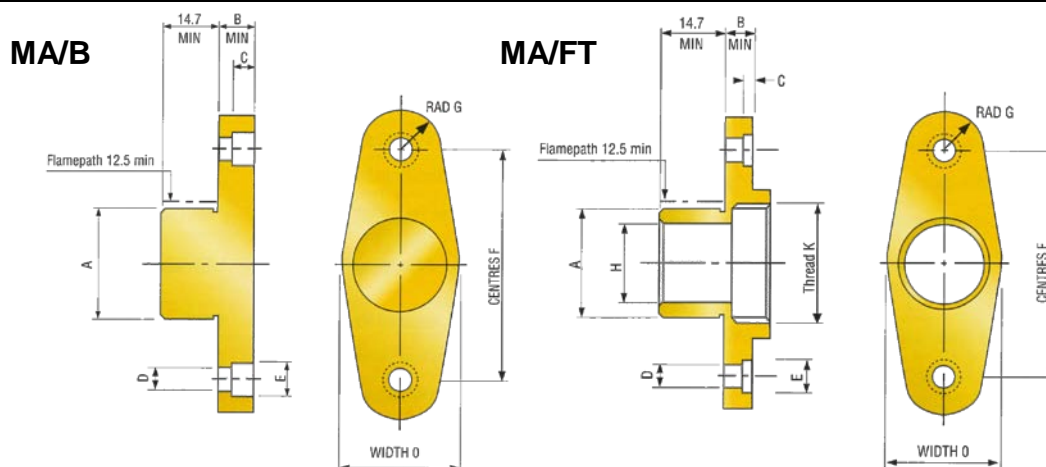

Adaptor Size	Bore Diameter 'H'	Length 'B'	Thread Diameter 'K'	Spigot Diameter 'A'	Width 'O'	Centres 'F'	Diameter 'D'	Diameter 'E'	Bore Depth 'C'	Radius 'G'
20S	11.7	11.1	20.0	19.05	27.0	44.45	6.6	11.5	7.0	12.7
20	14.0	11.1	20.0	19.05	32.0	44.45	6.6	11.5	7.0	12.7
25S	20.2	11.1	25.0	25.40	36.0	57.17	6.6	11.5	7.0	12.7
25	20.2	11.1	25.0	25.40	39.0	57.17	6.6	11.5	7.0	12.7
32	26.5	12.7	32.0	31.75	45.0	69.85	9.0	15.5	8.7	14.3
40	32.4	12.7	40.0	38.10	52.0	82.55	9.0	15.5	8.7	14.3
50S	38.4	14.5	50.0	50.80	58.0	95.25	11.0	19.0	10.5	17.5
50	44.3	14.5	50.0	50.80	64.0	95.25	11.0	19.0	10.5	17.5
63S	50.3	14.5	63.0	63.50	71.0	114.30	11.0	19.0	10.5	17.5
63	56.2	14.5	63.0	63.50	76.0	114.30	11.0	19.0	10.5	17.5
75S	62.2	18.0	75.0	76.20	83.0	127.00	14.0	21.0	13.5	17.5
75	68.2	18.0	75.0	76.20	88.0	127.00	14.0	21.0	13.5	17.5

All dimensions in millimetres

Note: Spigot Diameter "A" +0.00, -0.07 tolerance

TYPICAL ORDERING REFERENCE

ORDER REFERENCE DESCRIPTION

MGMA/B20	M20 Spigot Blanking Flange - Brass
MGMA/B25	M25 Spigot Blanking Flange - Brass
MGMA/B32	M32 Spigot Blanking Flange - Brass
MGMA/FT20	M20 Spigot Adaptor, Flange to Threaded Entry - Brass
MGMA/FT25	M25 Spigot Adaptor, Flange to Threaded Entry - Brass
MGMA/FT32	M32 Spigot Adaptor, Flange to Threaded Entry - Brass

Contact Sales for all other options / sizes.



Victor

VICTOR PRODUCTS LIMITED

New York Way, New York Industrial Park, Newcastle upon Tyne, NE27 0QF United Kingdom
Tel: 0191 280 8000, Fax: 0191 280 8080 e-mail: sales@victor.co.uk www.victor.co.uk

A Federal  Signal Company