



SPECIFICATION

- ▼ Voltage – 650/1300 Volt
- ▼ Current – 350 Amp
- ▼ 3 Mains contact pins
- ▼ 1 Pilot contact pin
- ▼ Weight – 11kg.
- ▼ Conductor CSA up to 120mm²
- ▼ Interface flange to BS 5620

FEATURES & BENEFITS

- ▼ Contact pins can be grubscrewed or crimped.
- ▼ Earth screened insulator.
- ▼ Electrical interlock through pilot circuit.
- ▼ Simple serviceable design.
- ▼ To facilitate the connection of trailing cables fitted with Type A40PR, 40PR, and 23PR restrained plugs to high powered mining machinery such as continuous miners, roadheaders, and other large capacity apparatus. Suitable for deep mine and opencast environments.

STANDARDS & CERTIFICATION

EN IEC 60079-0, EN 60079-1

ATEX Certificate No. Baseefa02ATEX0099U

Ex I M2 Ex db I Mb

UKEX Certificate No. BAS21UKEX0319U

Ex I M2 Ex db I Mb




Victor

VICTOR PRODUCTS LIMITED

Unit 3A, Tyne dock East Side, Port of Tyne, South Shields NE33 5SQ United Kingdom
Tel: 0191 280 8000, Fax: 0191 280 8080 Email: sales@victor.co.uk Web: www.victor.co.uk
A Federal  Signal Company

LEAFLET NO. DS004 REV 0 09/23

DIMENSIONS, SPARE PARTS & ORDERING REFERENCES

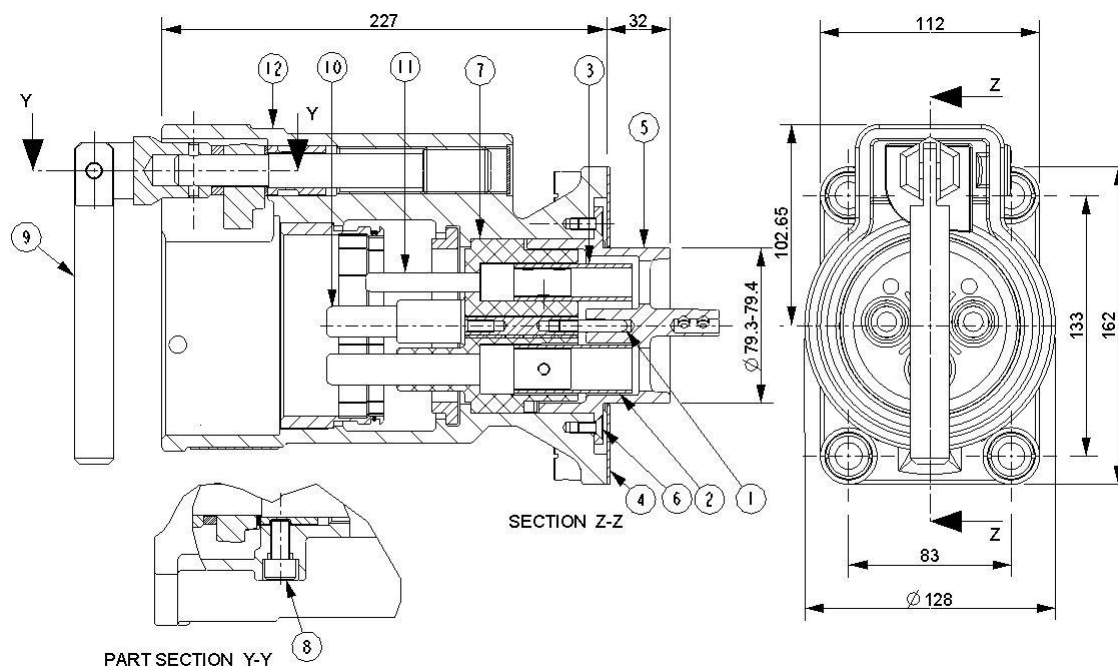

PART SECTION Y-Y

REF	ITEM No.	DESCRIPTION	QTY
1	MC123240	EARTH PIN	1
2	MC123534	MAINS INSULATING SLEEVE	3
3	MC123535	PILOT INSULATING SLEEVE	1
4	MC123541	FLANGE SEALING GASKET	1
5	MC923528	RETAINING CAP	1
6	GP217213	M6 x 12 LONG SLOTTED COUNTERSUNK HEAD SCREW	2
7	MC923529E	FLP SOCKET INSULATOR	1
8	GP218116X	M10 x 20 LONG SOCKET HEAD CAP SCREW	1
9	MC923954	WITHDRAWAL SPINDLE ASSEMBLY	1
10	MC924715A	MAINS CONTACT PIN - 120mm2 GRUBSCREWED	3
	MC924715B	MAINS CONTACT PIN - 95mm2 GRUBSCREWED	3
	MC924715C	MAINS CONTACT PIN - 70mm2 GRUBSCREWED	3
	MC924715D	MAINS CONTACT PIN - 35mm2 GRUBSCREWED	3
	MC924715E	MAINS CONTACT PIN - 50mm2 GRUBSCREWED	3
	MC123531AE	MAINS CONTACT PIN - 95mm2 CRIMPED	3
	MC123531BE	MAINS CONTACT PIN - 70mm2 CRIMPED	3
	MC123531CE	MAINS CONTACT PIN - 50mm2 CRIMPED	3
	MC123531E	MAINS CONTACT PIN - 120mm2 CRIMPED	3
11	MC924716A	PILOT CONTACT PIN - 4mm2 GRUBSCREWED	1
	MC924716B	PILOT CONTACT PIN - 25mm2 GRUBSCREWED	1
	MC123530	PILOT CONTACT PIN - 25mm2 CRIMPED	1
	MC123530A	PILOT CONTACT PIN - 4mm2 CRIMPED	1
12	MC925002-KIT	SOCKET BODY ASSEMBLY	1

ORDERING REFERENCE EXAMPLES - PLEASE SPECIFY CABLE CSA (mm2)	
ITEM NO.	DESCRIPTION
MCA002767AGE	TYPE A40SR, 95mm2 MAINS, 4mm2 PILOT - GRUBSCREWED
MCA002767BGE	TYPE A40SR, 70mm2 MAINS, 4mm2 PILOT - GRUBSCREWED
MCA002767CGE	TYPE A40SR, 35mm2 MAINS, 4mm2 PILOT - GRUBSCREWED
MCA002767GE	TYPE A40SR, 120mm2 MAINS, 4mm2 PILOT - GRUBSCREWED
MCA002767HGE	TYPE A40SR, 50mm2 MAINS, 4mm2 PILOT - GRUBSCREWED
MCA002767AE	TYPE A40SR, 95mm2 MAINS, 4mm2 PILOT - CRIMPED
MCA002767BE	TYPE A40SR, 70mm2 MAINS, 4mm2 PILOT - CRIMPED
MCA002767E	TYPE A40SR, 120mm2 MAINS, 4mm2 PILOT - CRIMPED
MCA002767JE	TYPE A40SR, 95mm2 MAINS, 25mm2 PILOT - CRIMPED

